

## Contact

PLUSSPRINGS MACHINERY CO., LTD.  
No.60, Ln. 15, Touqian Rd., Xinzhuang Dist.,  
New Taipei City 24252, Taiwan (R.O.C.)  
Tel: +886 (0)2 2277 8595  
Fax: +886 (0)2 2277 7928  
E-Mail: info@plusprings.com

Beyond Today



**ZX-250**


Unique Solution Tailored to the Demands of  
Wire Forming Industry



# ZX-250


**Setup Time is Significantly Reduced**

Thanks to the innovative machine design with full consideration of set up preparation. All the X / Y tables and tool holders have measuring scale that allow to minimize the set up time and easy to achieve repeatability of positioning for the previous setting.

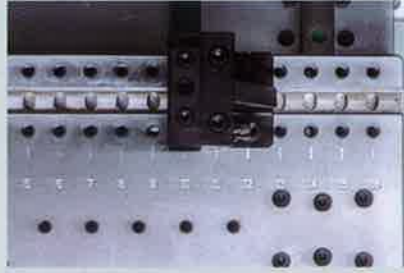


**New Definition of Great Flexibility**

The ZX-250 has 2 compound tables enables eccentric working without additional tooling requirements and also create a bigger work zone. Thanks to the concept of Double Compound Table (DCT) system. It minimized the tooling cost and created an easier and simple way to cope with more complex products.

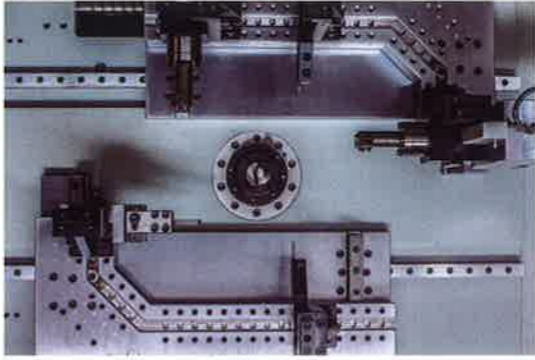


**Efficient Productivity and Modular Production Line**

Reduction of set up time and tooling cost, stable and high speed output assure the possibility of success business. Based on the extraordinary structure of machine design allows highly complex bending procedures can be carried out. Also, the measuring scale brings the convenience of tool positioning repeatability and ease of tool management. ZX-250 is one of the unique solutions tailored to the demands of wire forming industry.




**Versatile, Powerful and Reliable**

The ZX-250 has 9 axes in standard (Max. 16 axes). Total 4 axes situated on the 2 individual compound tables which control X and Y movement, 1 axis for rotary wire, 1 axis for rotary quill and 2 servo spinners ensure the flexibility. The bigger work zone comply ergonomics and comfort in service of performance and reduction of work space limit. Thanks to the concept of this newly design allows operator's idea can be easily carried out.

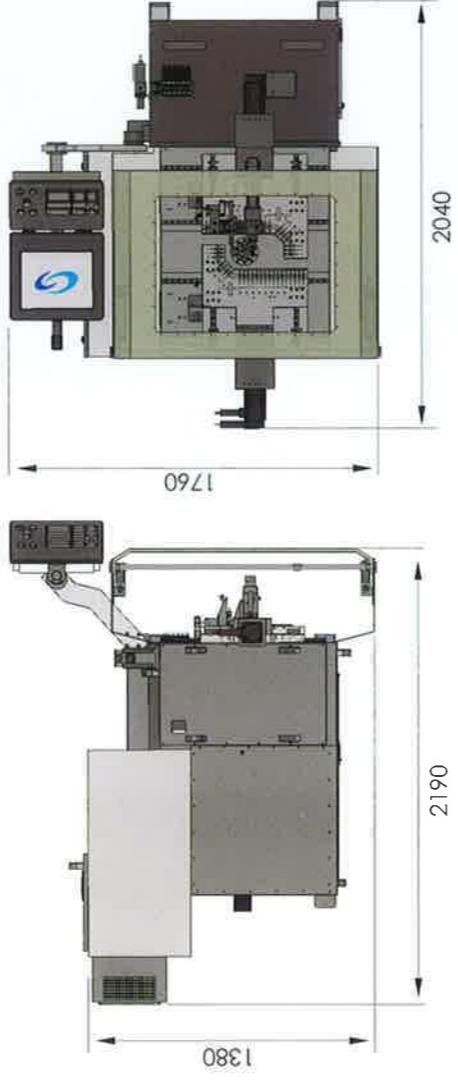

## SPECIFICATION

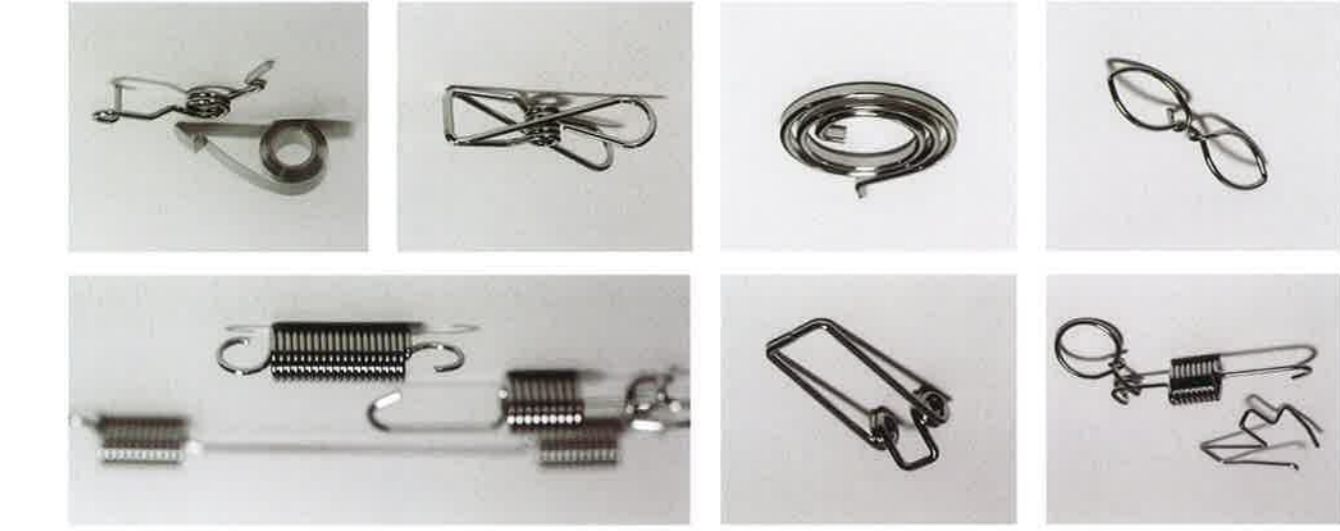

Capability	
Material Range	Wire $\Phi$ : 0.5-2.5 / Strip TO.15X12
Max. O.D.	100 mm
Max. Bending Return Length	85 mm
Power Supply & Dimension	
Power Supply	220V(*380V) 3P 50/60Hz 5.0kva
Machine Dimension (LxWxH)	2190x 1760x 2040 mm
Weight	1700 kg
Standard	
9 axes (*Max. 16 axes)	

Y Table x 2	
Max. Travel	300 mm
Min. Increment	0.01 mm
Max. Rated Speed	2500 RPM
Motor Output	2.0 kW

Feed x 1	
Min. Increment	0.01 mm
Max. Increment	99999.99 mm
Max. Feed Speed	140m / min
Max. Rated Speed	750 RPM
Motor Output	3.0 kW

Rotary Quill x 1	
Min. Increment	0.1°
Max. Increment	9999°
Max. Rated Speed	250 RPM
Motor Output	400 W

Spinner x 2	
Min. Increment	0.1°
Max. Increment	9999°
Max. Rated Speed	300 RPM
Motor Output	400 W

\* Option